

Informationen zum Produkt




S2000V Siegelschale



Füllvolumen:	Maße:	Höhe:	Gewicht Becher, Deckel (+/-3%)	IML-Druck Becher	IML- Druck Deckel	Weiteres:
200ml	118x88mm	37,5mm	11g / 8g	ja	ja	Siehe Spez.
<ul style="list-style-type: none"> • PP-Spritzguss-Siegelbecher mit Siegelrand (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) 						
Menge je Palette Schalen:	in 16 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
14.400 St.	900 St.	580x380x280mm 400g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.
Menge je Palette Deckel:	in 24 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
21.600 St.	900 St.	545x335x265mm 380g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.

Technical specification:

Tolerance:
 Weight/Volume +/- 5,0%
 Dimensions +/- 0,5 mm

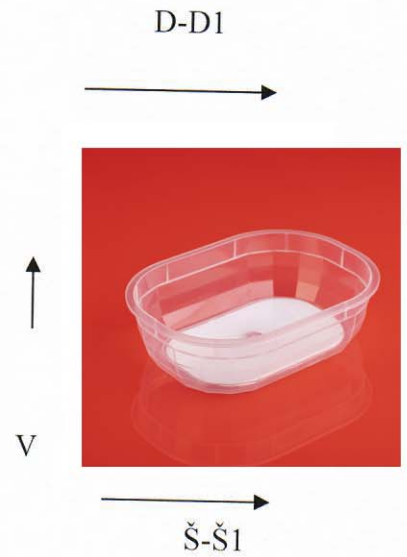

	Container	Lid
Volume upto the edge	200 ml.	
Material/weight	PP/ 11 g	PP/ 8 g
Top dimension D-D1	118x88 mm	122x91
Bottom dimension Š-Š1	96x65 mm	
Height with lid V	V 37,5 mm	11 mm
Number in 1 ct	900	900
Number of ct on 1 pal.	16	24
Note: under lid has to be foil, could be used only with foil – without lid		

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.